



C A B U C H O N[®]

B A T H f o r m s

HADRIAN SOAKING BATH

NORMAL WATER REQUIREMENT

200 Litres (44 Imperial Gallons)

KEY TO SIZES: ■ Millimetres □ Inches to nearest 1/4"



This bath is supplied with only waste & overflow holes drilled in order to allow options on jobsite in the positioning of spouts, taps, handshowers & whirlpool controls. The only rule is good plumbing. The Hadrian requires an extended waste/overflow.

The bath has four screw-adjustable feet allowing an adjustment between 640mm/25 1/4" maximum and 590mm/23 1/4" minimum mm for the total height of the bath. If used as an Inset bath the weight must be on the feet, not the rim.

The panel, for which installation instructions are overleaf, projects 17mm from the outside rim of the bath and has dimensions of L1541mm/60 3/4" x W857mm/33 3/4" x H560mm/22".

Minor changes can be made to length, width or height of baths or panels for additional cost.

All Cabuchon products are registered designs covered by copyright and the Company, being committed to continuous innovation and improvement, reserves the right to change specifications without notice. Tolerances are + or - 3mm.

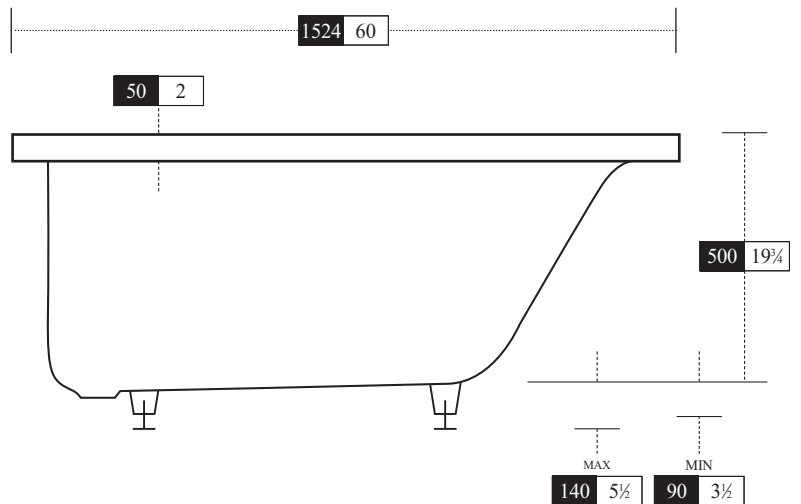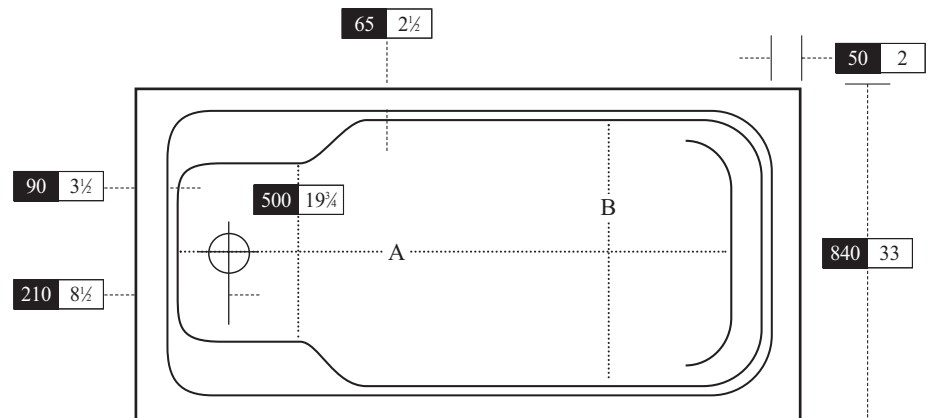

	A	B
Top	1280	680
	50 1/2	26 3/4
Bottom	1200	520
	47 1/4	20 1/2