



C A B U C H O N[®]

B A T H *f*o *r*m s

REGENCY

NORMAL WATER REQUIREMENT

216 Litres (48 Imperial Gallons)



KEY TO SIZES: ■ Millimetres □ Inches to nearest 1/4"

This bath is supplied with only waste & overflow holes drilled in order to allow options on jobsite in the positioning of spouts, taps, handshowers & whirlpool controls. The only rule is good plumbing.

The bath is supplied with four screw-adjustable feet. If used as an Inset bath the weight must be on the feet, not the rim. Installation instructions for the panel are shown overleaf.

Minor changes can be made to the length, width or height of the baths or panels for additional cost.

All Cabuchon products are registered designs covered by copyright and the Company, being committed to continuous innovation and improvement, reserves the right to change specifications without notice. Tolerances are + or - 3mm.

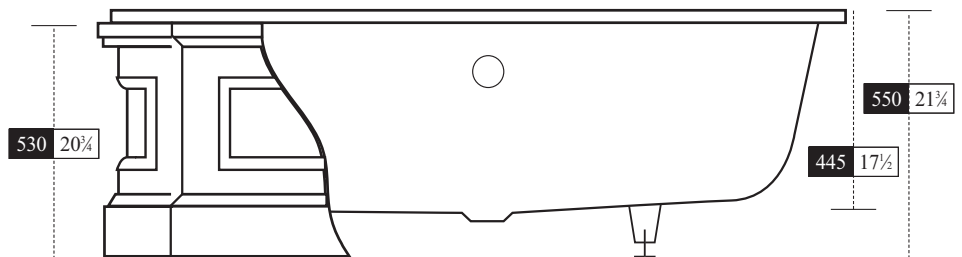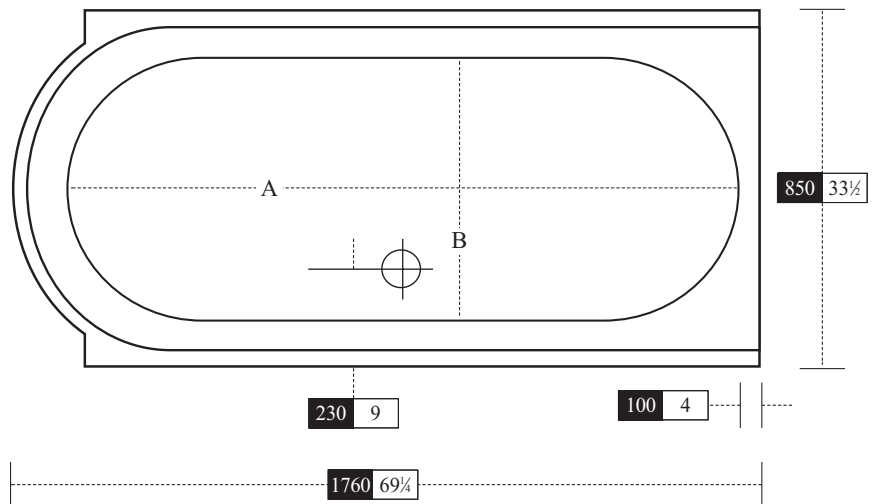

	A	B
Top	1530 60 1/4	650 25 1/2
Bottom	1210 47 3/4	500 19 3/4