



TAKARA DEEP SOAKING BATH

Specification Sheet

Bathing Depth

In well: 615 mm/24 1/4"

At seat: 388 mm/15 1/4"

Note: Manufacturing tolerances are + or - 3 mm.

Pre-installation:

There is no difference in practical construction terms and in plumbing between installing a deep soaking tub and a standard bathtub. The only rule is good plumbing. The Takara, turned on its side, will pass through a door of 29 3/4" / 755mm. It may be necessary otherwise to remove the door's side panels or architraves, to make a wider gap. However, one of the major properties of our Ficore® composite, from which we build our baths, is that, to a small degree, it permits us to modify the external dimensions of a rectangular bath by building it with narrower or wider rims. You are not therefore tied to the exact dimensions on the specification sheet.

See our FAQs for more details – www.cabuchon.com/faqs/



(Installation notes can be found overleaf.)

MAXIMUM WATER REQUIREMENT:

344 Litres, 76 Imperial Gallons, 91 US Gallons

WEIGHT: 38 kg/84 lbs (empty). 382 kg/842 lbs (filled to overflow.)

KEY TO SIZES: Millimetres Inches to nearest 1/4"

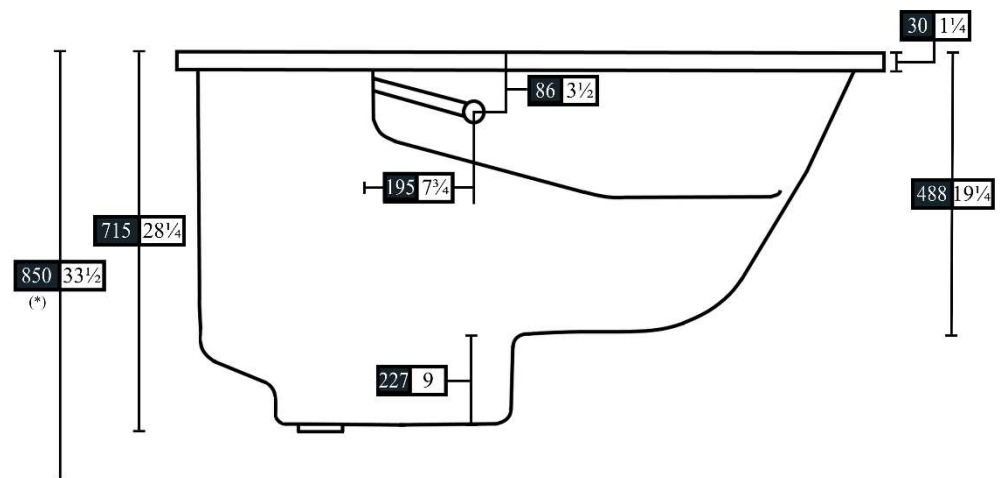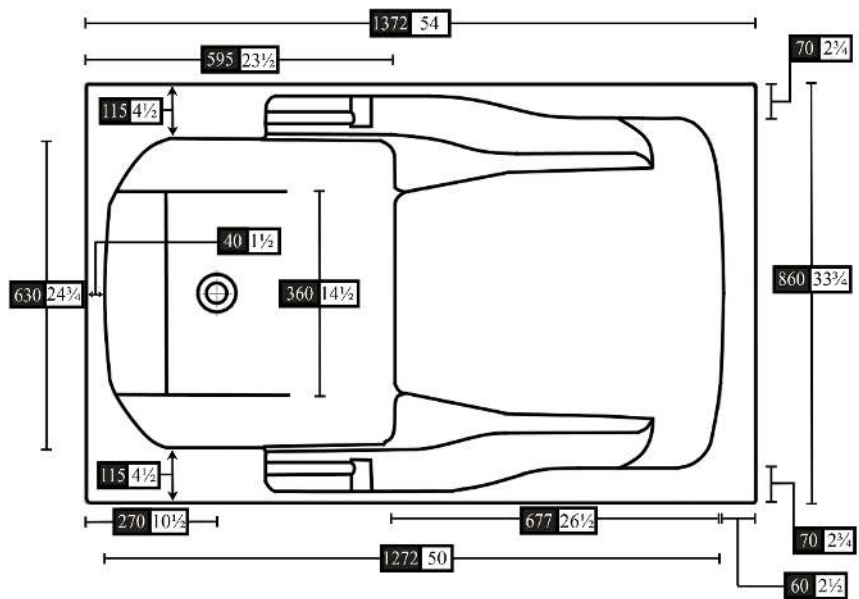

Registered office: Whitegate, Lancaster LA3 3BT, England

Cabuchon is a registered trademark of Design & Form Ltd. Cabuchon Bathforms is a division of Design & Form Ltd.

Installation

The Takara can be installed sunken or semi sunken into a deck, or inset (drop-in), undermounted, or free standing with panels. If not sunken it should have a step for easy entry or exit. The step can be fixed or removable when not in use.

(*) Finished External Height is 850 mm/33 ½”.

Panels

We do not supply panels as standard because there are many possible styles and variations available to suit different décors. However, we are happy to do so on a bespoke basis. Panels are fabricated in Ficore® and they can be supplied either loose or integral to the bath. If the former, then for reasons of or security and stability, they are supplied in one piece - no matter how many sides are required.

Hydrotherapy Systems

The Takara deep soaking tub was designed to be fitted with one of our optional hydrotherapy systems, in order to deliver an even greater degree of pleasure and comfort, and to act as an aid to health. For details, specifications and illustrations, please refer to the Hydrotherapy section of our website. See: <https://www.cabuchon.com/hydrotherapy/>

Waste/Overflow

Due to its greater depth, the Takara requires an extended waste/overflow - meaning that it requires a longer than standard cable to operate the plug. We ship the bathtub with waste and overflow holes drilled; located as specified by the codes and regulations of the country where the bathtub is to be installed. These permit the overflow hole to be located facing the seated bather, or in the left- or right-hand walls of the well. We do not undertake to ship a bathtub with other predrilled holes. These should all be drilled on site to avoid possible miscommunication and error.

Note: We keep a small stock of combined filler/overflows, which remove the need for a spout.

Grab Bars

The Takara is provided with secure grab bars for an added sense of security. Grab bars are supplied in a chrome finish as standard, but other finishes are available. Please ask for a quotation for a finish other than chrome. The bath can also be provided without grab bars if preferred.

Copyright Design

The Takara is a registered design of the company and is covered by copyright. The company, being committed to continuous innovation and improvement, reserves the right to change product specifications without notice.

Registered office: Whitegate, Lancaster LA3 3BT, England

Cabuchon is a registered trademark of Design & Form Ltd. Cabuchon Bathforms is a division of Design & Form Ltd.